


Website: www.chinasinoy.com


Email: chinasinoysales@gmail.com

MSN: chinasinoysales@hotmail.com

Skype: [cnsinoy](https://www.skype.com/people/cnsinoy)

Online service support

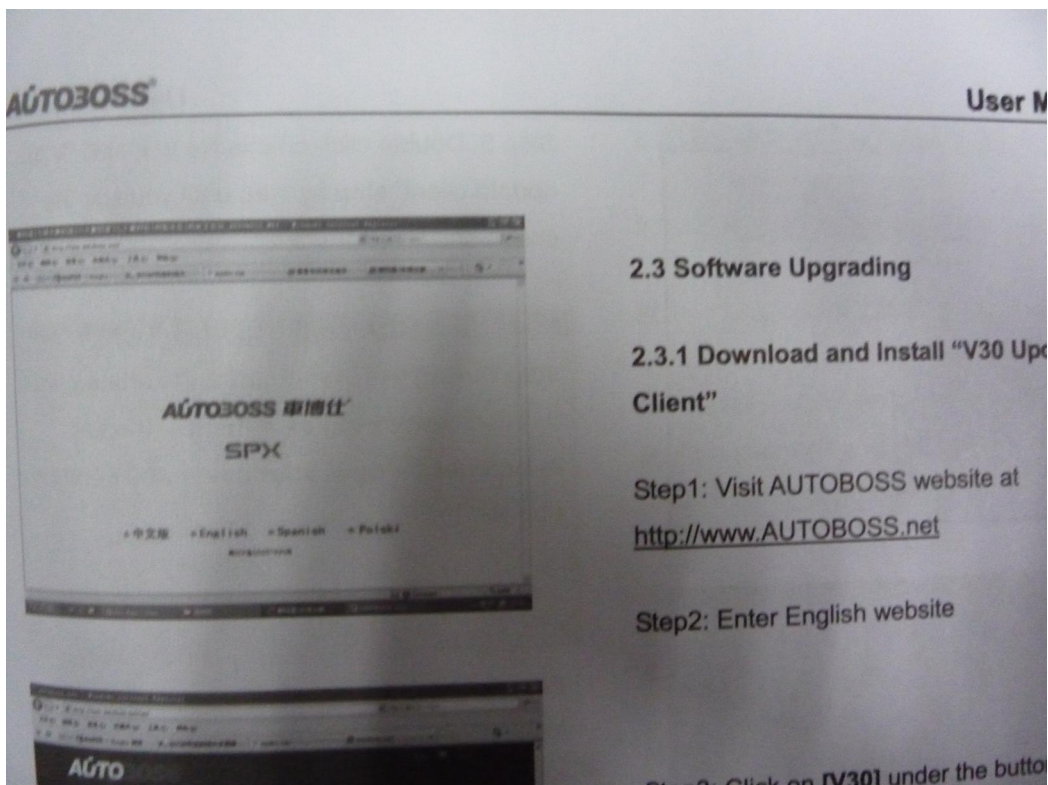

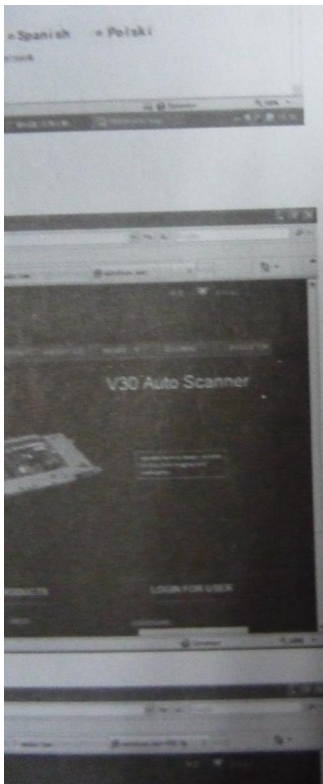

<http://www.AUTOBOSS.net>

Step2: Enter English website

Step3: Click on **[V30]** under the button **[Download]** to enter download screen as shown in left image.

Step4: Click on the option **[V30 Update Client]** to download the update client to your PC.

Step4: Click on the option **[V30 Update Client]**
to download the update client to your PC.

... will be saved in


A file named **V30setupEn.exe** will be saved in
your PC.

User Manual

Step 5: Double click on this file to install "V30 update client" step by step until you see the image shown on the left.

Note: Just click on the button [Next] in each step during the installation. We advise you to keep everything as default. Please remember to input your name and company name.

After finishing the installation, you will see the icon shown below on your desktop.

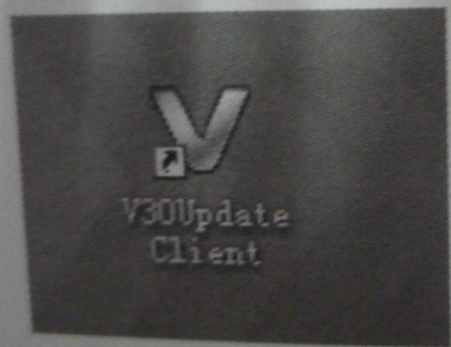

Download of "V30 update client" is finished.

2.3.2 Check V30 S/N and Password

Check the **S/N**: Please refer to **2.2.7 Version information** in this manual;

How to get password:

Click on the button **[Activate]** to get the original register password as shown in left image.

How to get password:

Click on the button **[Activate]** to get the original register password as shown in left image.

2.3.3 Upgrading Instructions

2.3.3.1 Run V30 update client program

Step1: Take out the SD card from main unit, plug it into the USB SD card reader and connect to PC. Step 2: Double click to run the **V30 update client** program on your PC and go to update screen as shown in Fig 2-1.

2.3.3.2 Login the Server

- (1) Input the serial number and password then click on the **[OK]** button to connect to server. It takes some seconds before the download is finished like Fig 2-2.
- (2) The default server is 'www.AUTOBOSS.net'. Normally you do not have to change the server.

- ① Be sure that both S/N and password are correct. Please pay attention, the letters are case sensitive!
- ② If login takes a long time because of low internet speed, you can exit and retry;
- ③ Internet firewall might affect the login. If login fails, please make sure you have an internet connection, and ensure any installed firewall is not blocking the connection to the server. For detailed operation instructions, please contact technical support.

Download diagnostic program list successful

Fig 2-3 Program list screen

The image shows a dialog box titled "Update client V2.10" with a close button (X) in the top right corner. The dialog contains three input fields on the left: "Login" (empty), "S/N" (containing "v30233118"), and "Password" (empty). On the right side, there are three buttons: "OK" with a checkmark icon, "Modify password" with a key icon and a lock icon, and "Cancel" with an X icon. The "Modify password" button is circled in red.

Fig 2-4 Modify password